

Laundry Presses – Air operated

FPA1-WC, FPA2-WC, FPA3-WC




Features and benefits

- High temperature stainless steel polished head dries the fabric and gives it a flat finish
- High pressure achieves an excellent finish
- Adjustable pressure regulator for pressing different fabrics achieves an excellent finish
- Air operated reduces operator fatigue and allows high production output
- Two button closing improves operator safety
- High quality padding and cover for buck reduces impressions
- Easy installation and operation due to no vacuum needed and therefore no pedal


Main options

- Integral steam boiler – 9 kW
- Integral air compressor
- Electric steam iron
- Safety head guard (CE) improves operator safety
- Adjustable release timer simplifies the operation and ensures consistent results
- Water spray gun with support and condenser


| Electrical connections | Standard | | Optional | | |
|--|------------|----------------------------------|-----------------|----------------------------------|---------------------|
| | | | Built-in boiler | Built-in air comp. | Electric steam iron |
| Voltage, standard 208-240V 1 AC 50/60 Hz | kW (A) | - | - | - | 0.8 (6) |
| Voltage, built-in boiler 230V 3 AC 50/60 Hz | kW (A) | - | 9 (25) | 0.75 | - |
| Steam, air and vacuum | | | | | |
| connection Steam | DN | 15 | - | 15 | 15 |
| Rec. steam pressure | kPa | 700 | - | 700 | 700 |
| Steam consumption | kg/h | 20 | - | 20 | 20 |
| Condensate | DN | 15 | - | 15 | 15 |
| Compressed air | DN | 10 | 10 | - | 10 |
| Rec. air pressure | kPa | 700 | 700 | - | 700 |
| Air consumption | l/min | 6 l/cycle | - | - | - |
| Shipping data | | | | | |
| | net, kg | 326 | + 46 | + 46 | + 6 |
| | crated, kg | 356 | + 46 | + 46 | + 6 |
| Dimensions in mm | | | | | |
| A Width | | 1250 | 1250 | 1250 | 1250 |
| B Depth | | 920 | 920 | 920 | 920 |
| C Height | | 1250 | 1250 | 1250 | 1250 |
| D | | 1450 | 1450 | 1450 | 1450 |
| E | | 800 | 800 | 800 | 800 |
| F | | 1030 | 1030 | 1030 | 1030 |
| G | | 1190 | 1190 | 1190 | 1190 |
| H | | 360 | 360 | 360 | 360 |
| I | | 220 | 220 | 220 | 220 |
| J | | 470 | 470 | 470 | 470 |
| K | | 205 | 205 | 205 | 205 |
| L | | 520 | 520 | 520 | 520 |
| M | | 260 | 260 | 260 | 260 |
| N | | 1490 | 1490 | 1490 | 1490 |
| 1 Control panel | | 4 Condensate | | 7 Boiler drain (built-in boiler) | |
| 2 Electrical connection | | 5 Compressed air | | | |
| 3 Steam connection | | 6 Water supply (built-in boiler) | | | |

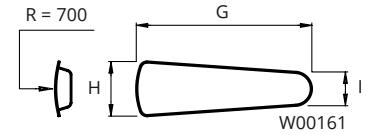

Utility shape
FPA1-WC shown

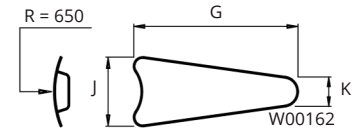

Utility/legger shape
FPA2-WC shown



Mushroom shape
FPA3-WC shown

